

CT-PPSK-3810-WA

CINTAREPARADORA DE MBI DE POLIPROPILENO BLANCO


CARACTERÍSTICAS:

- Excelente adherencia
- Adhesivo para clima frío
- Buena resistencia al vapor de agua

APLICACIONES:

Utilizada para el sellado de colchoneta aislante con revestimiento de polipropileno blanco, lona, kraft y juntas de aislamiento en la industria de la construcción y la ventilación.

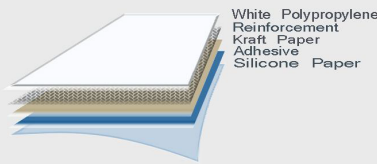

Construction		White Polypropylene (PP 38μ) 3-Way Fiberglass Scrim Kraft Paper 35 g/m ² Solvent-based acrylic adhesive Silicone release paper liner		
	PROPIEDADES	Medidas	Inglés	METODO
Espesor de respaldo	120 Micras	4.8 mil	PSTC-133 / ASTM D 3652	
Espesor total	170 Micras	6.8 mil	PSTC-133 / ASTM D 3652	
Adherencia al acero	20-25 N/25mm	72-90 Oz/inch	PSTC-101 / ASTM D 3330	
Rollo base (11 mm ball)	15 cm	6 inch	PSTC-101 / ASTM D 3330	
Resistencia a la tracción	185 N/25mm	42 Lb/In	PSTC-131 / ASTM D 3759	
Estiramiento	1%	1 %	PSTC-131 / ASTM D 3759	
Temperatura de servicio	-30 +80 C	-22 + 176 °F	-----	
Core I.D.	76mm	3"		
Ancho de Rollo	48mm, 50mm (2"), 60mm, 63mm (2.5"), 72mm, 75mm (3"), 96mm, 100mm (4")			
Largo de Rollo	45m (50 yards), 50m			
Medidas Jumbo o longitudes tambien disponibles.	1200 mm x 750 - 850 m			


- The data above are typical results from tests conducted on samples taken from production runs and may be updated without notice. Typical values are not intended to be used for specification development.
- The product should be stored in the original packaging material at 20 +/- 5 C and 40-60% relative humidity and protected from direct sunlight, heat and moisture. Shelf life: One year when stored at the conditions described above.
- The surface to which the tape is applied must be clean, dry, free of grease and oil and other contaminants and deposits. Recommended temperature of application: 50 - 105 °F (10 - 40 °C).
- The user is responsible for determining whether the product is fit for a particular surface and suitable for user's application. The user should make necessary tests and trial-application of the tape to confirm suitability for user's special purpose and method of application.
- Self adhesive tapes are designed for sealing applications only. In the instance when the sides of the joint are subject to mechanical stress, both sides should be securely positioned using appropriate fasteners or hangers prior to the self adhesive tapes application.
- Calem Technology warranty that the product is free from defects in material and workmanship. Should any failure to conform to this warranty appear within one year after the initial date of shipment, Calem Technology shall, upon notification thereof and substantiation that the product have been stored and applied in accordance with the above requirements, at Calem Technology discretion, replace or credit the product's purchasing price equivalent.
- Limitation of liability. Calem Technology Inc. and seller of CT Tape products will not be liable for any loss or damage arising from the CT Tape product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



1-604-277-6643
186-8120 No. 2 Road
Richmond, BC
V7E 3E6, Canada



Distribuidores Autorizados


Norte 94, #4534 Nueva Tenochtitlan
07890 Gustavo A. Madero, CDMX

✉ info@solucionesenaislamiento.com

☎ (55) 9129-8722 📞 (55) 7990-6920

● www.solucionesenaislamiento.com